

# 4125

## SEARCH & RECOVERY SIDE SCAN SONAR SYSTEM

### FEATURES

- Ultra high resolution images
- Lightweight for one person deployment
- Easy to setup and operate
- Runs on AC or DC
- Optional quick change tow bracket for ship hull inspections
- Extremely rugged construction

### APPLICATIONS

- Search and Recovery
- Port Security
- Hull Inspections
- Channel/Clearance Surveys
- Bridge/Pier/Harbor Wall Inspection



EdgeTech's 4125 Side Scan Sonar System was designed specifically for the Search & Recovery (SAR) market as a rugged, portable, easy-to-use system that will provide ultra high resolution imagery. The 4125 utilizes EdgeTech's Full Spectrum® CHIRP technology, which provides higher resolution imagery at ranges up to 50% greater than standard non-CHIRP systems. This translates into more accurate results and faster surveys, both critical components of SAR missions.

The 4125 System comes with a 600/1600 kHz dual simultaneous frequency towfish that is optimally suited for SAR applications, providing an excellent combination of long range search capability and ultra high resolution images for detection of very small objects.

The system can be powered by both AC and DC for added versatility and is delivered in portable rugged cases for ease of transport from site-to-site. As is standard with all of EdgeTech's towed side scan systems, the 4125 comes with a safety recovery system which will prevent the loss of a towfish if it becomes snagged on an obstacle during a survey.

EdgeTech's easy-to-use Discover acquisition software is included with the system as standard and includes both Target Logger and Coverage Mapper modules.

A standard 4125 System comes with a rugged stainless steel towfish and a portable water resistant topside processor including a splash-proof, drop & shock resistant laptop computer. A 50m Kevlar tow cable is included as standard with customer-specified lengths also available.



For more information please visit [EdgeTech.com](http://EdgeTech.com)


[info@EdgeTech.com](mailto:info@EdgeTech.com) | USA 1.508.291.0057

# 4125

## SEARCH & RECOVERY SIDE SCAN SONAR SYSTEM

### KEY SPECIFICATIONS

SONAR	
Frequencies (Dual Simultaneous)	600/1600 kHz (optimal for SAR) or 400/900 kHz towfish
Pulse Type	EdgeTech's Full Spectrum® CHIRP (user selectable CW pulses)
Operating Range	150m @ 400 kHz, 75m @ 900 kHz; 120m @ 600 kHz, 35m @ 1600 kHz
Horizontal Beam Width	0.46° @ 400 kHz, 0.28° @ 900 kHz; 0.33° @ 600 kHz, 0.20° @ 1600 kHz
Vertical Beam Width	50°
Resolution Across Track	400 kHz: 2.3 cm, 900 kHz: 1.5 cm, 600 kHz: 1.5 cm, 1600 kHz: 0.6 cm
TOWFISH	
Material	Stainless Steel
Diameter	9.5 cm (3.75 inches)
Length	97 cm (38 inches)
Weight in Air	15 kg (34 pounds)
Standard Sensors	Roll, Pitch, Heading, Pressure (Depth)
Depth Rating	200m
Tow Cable	50m Kevlar cable included, customer-specified lengths also available
SPLASH-PROOF TOPSIDE PROCESSOR	
Power Input	12-24 VDC or 115/230 VAC, 50/60 Hz
Connections	AC, DC, Ethernet (to laptop), Towfish
Hardware	Ruggedized splash-proof, drop & shock resistant laptop
Operating System	Windows® XP
Acquisition Software	EdgeTech DISCOVER
SYSTEM OPTIONS	
	Quick change tow bracket for ship hull inspections, keel weight, v-fin depressor wing, pole mount

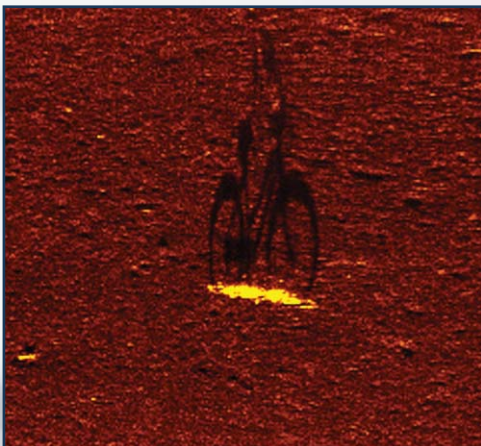

For more information please visit [EdgeTech.com](http://EdgeTech.com)

info@EdgeTech.com | USA 1.508.291.0057